


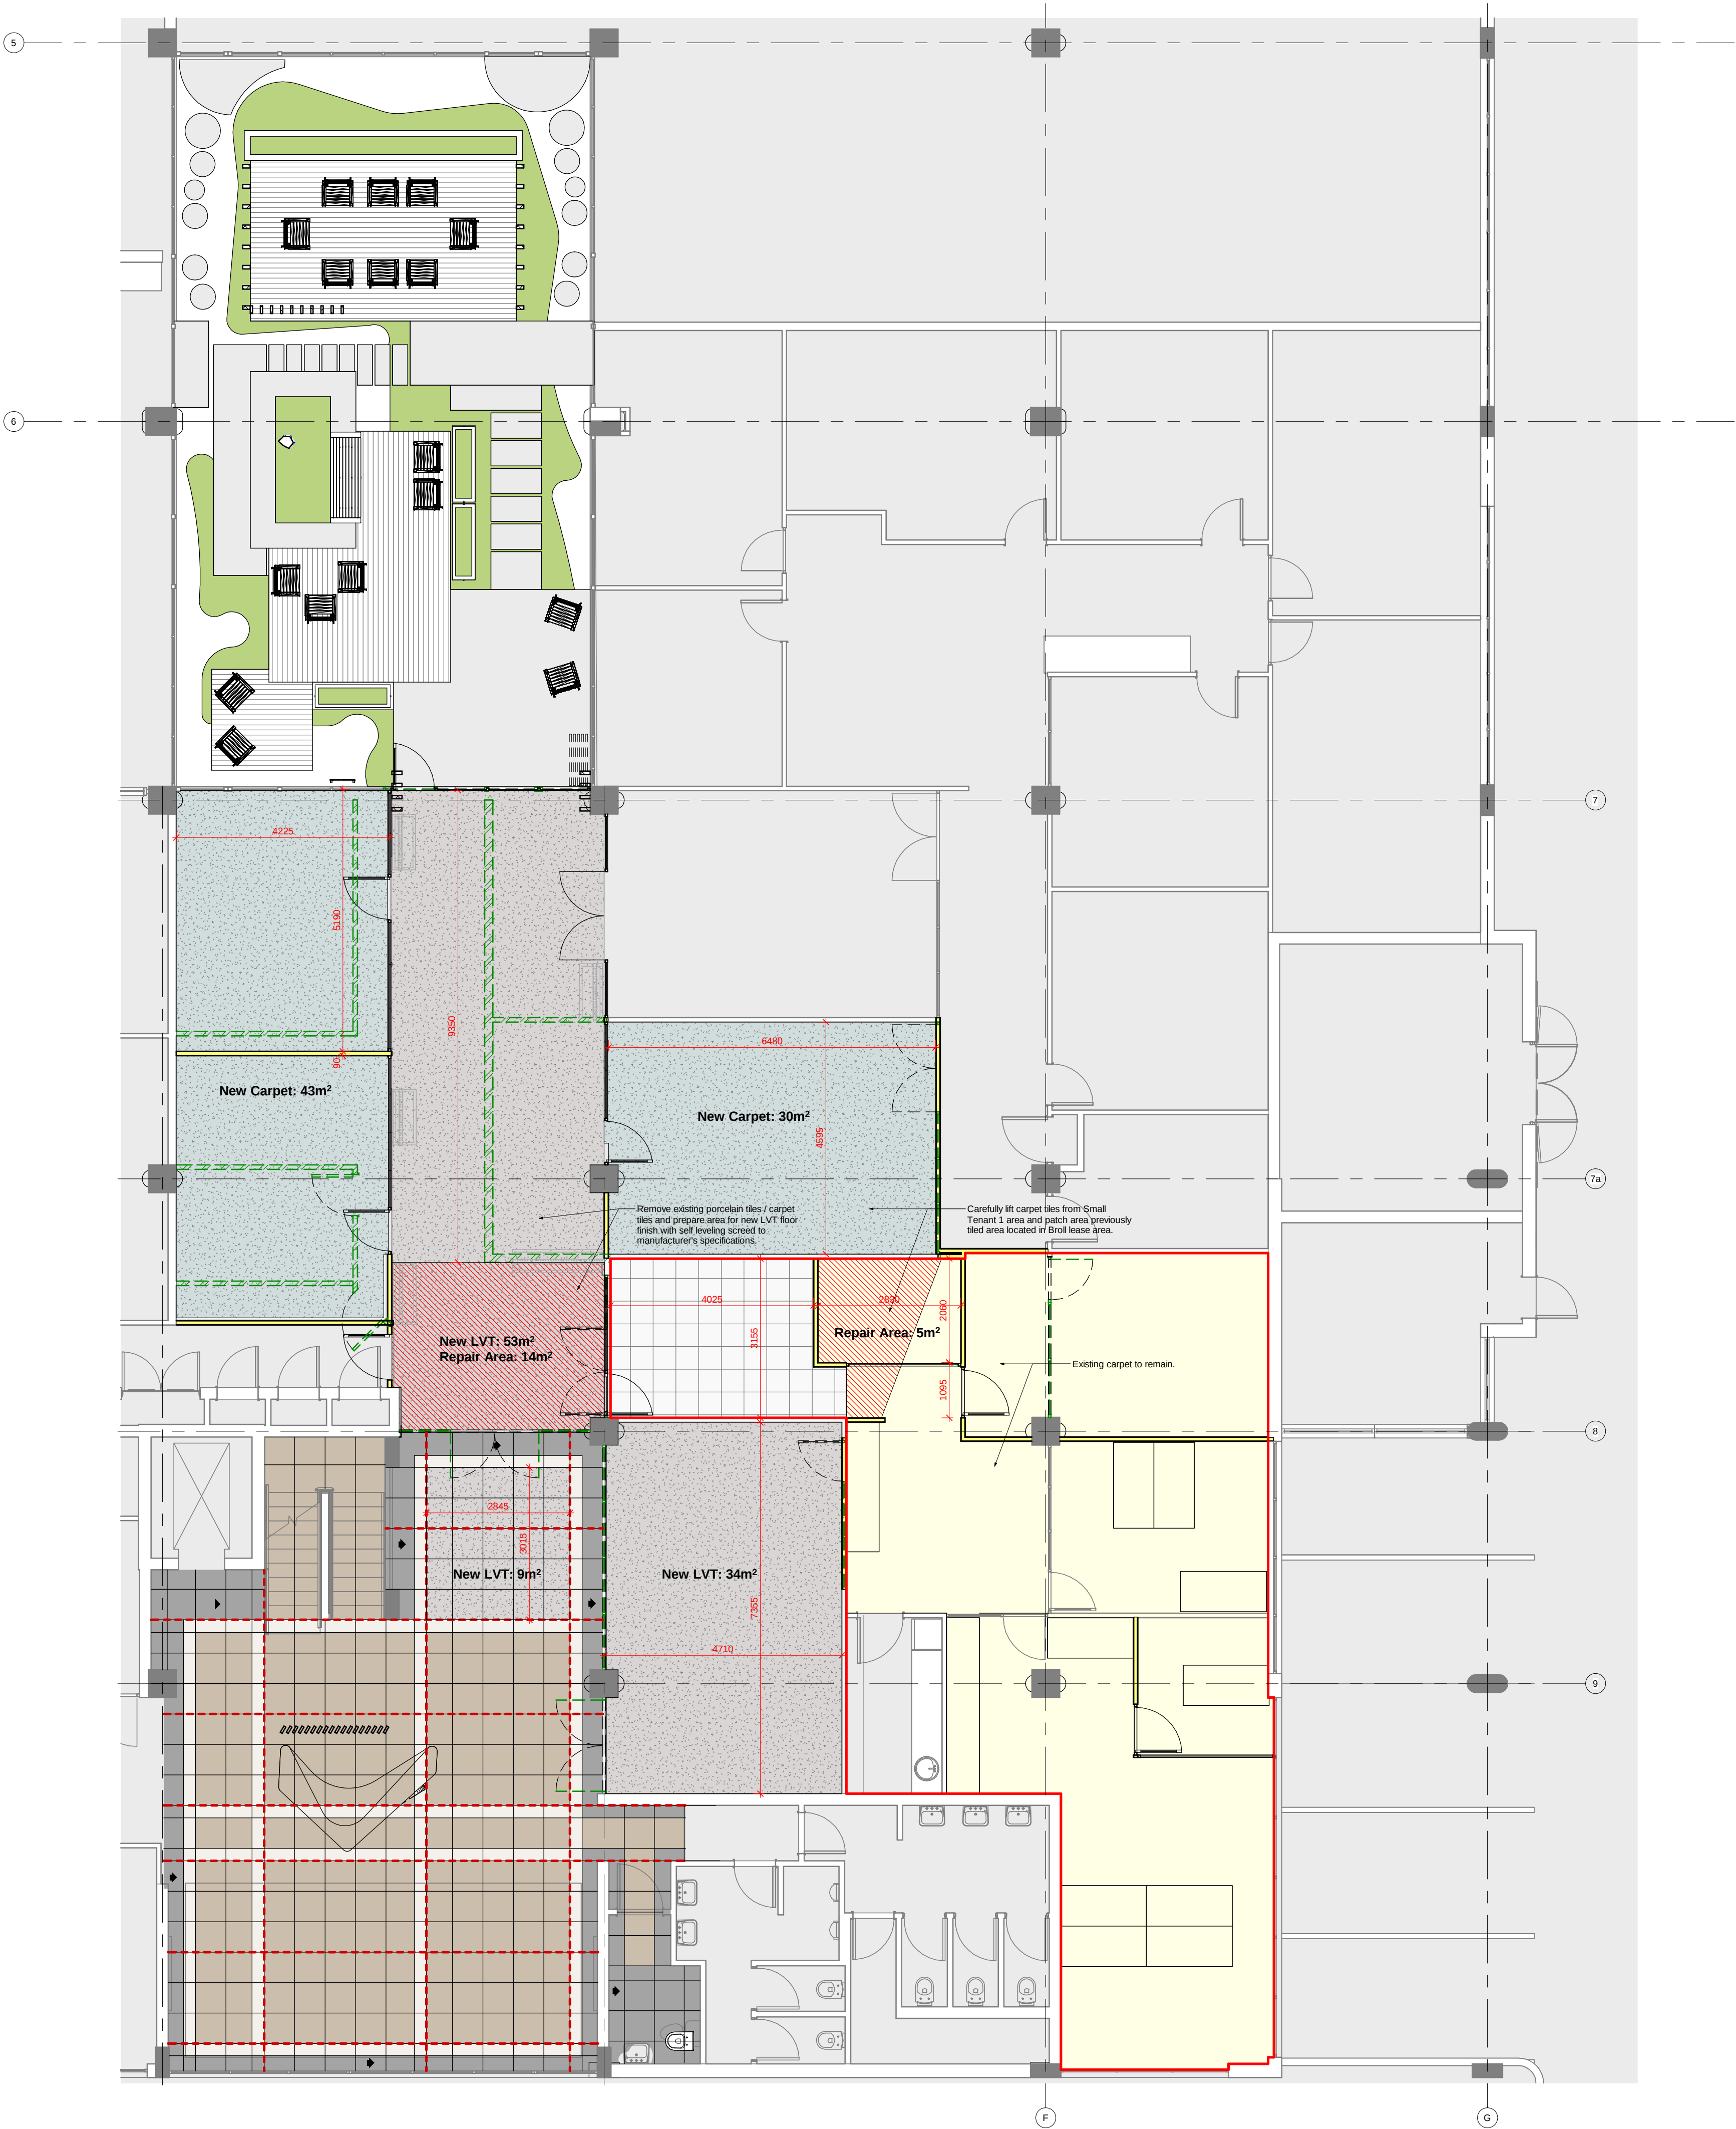

FLOOR FINISHES LEGEND	
New glue down LVT floor finish. Finish to be Belgotex's SELECT PRO with 2.5mm (total thickness) Heavy Commercial Use Dry back-stick down LVT vinyl. Size: 1219.2 x 228.6mm with 0.35mm wear layer. Ensure product is installed in strict accordance with manufacturer's specifications to ensure a 10 year commercial warranty. This product is to be laid in accordance with SANS 10070 fitting code of practice.	
New SHIFT 50x50cm Heavy Commercial 5mm NewBac tiles manufactured from Stainproof SDX (Solution Dyed Nylon 6 for Extreme Conditions), laid in accordance with the SANS 10186 fitting code of practice. Belgotex Accelerate 50x50cm tiles to be installed in Tessellated pattern and strict accordance with manufacturer's specifications to ensure a 15-year warranty and 5-year guarantee.	
Existing White polished porcelain tiles to be reduced as indicated on plan. Disturbed area to receive carpet tiles matching the adjacent existing finish falling within Broff's lease area.	

BouNouTM

PURPOSE IN ACTION

W W W . B O U N O U . C O . Z A

This drawing is the property of BouNou Management (Pty) Ltd. Copyright is reserved by them and the drawing is issued on the condition that it is not copied, reproduced, retained or disclosed to any unauthorised person, either wholly or in part without the written consent of BouNou Management (Pty) Ltd.

REVISIONS

No.	Description	Date
-----	-------------	------

PROJECT TEAM

CLIENT

Applemint Properties 41 (Pty) Ltd
Contact Person: Alan Orchard
Address: PO Box 13105 Brookies Hill, 6013
Telephone: 041 581 8488
Facsimile: 041 581 8250
E-mail:

Name: _____

Signed : _____ Date : _____

ARCHITECTS

BouNou
Contact Person: Paul Schmidt
Address: 71 Admiralty Way, Summerstrand - Port Elizabeth
Telephone: +27 (0)2 376 7254
E-mail: paul@bounou.co.za
Name : Paul Schmidt - SACAP no: Pr Arch 6227

Signed : _____ Date : _____

IMPORTANT GENERAL NOTICES

The contractor is to keep a full set of drawings on site, contractor is responsible for the correct setting out of the building on site with particular reference to boundaries and building lines; contractor to verify all levels and dimensions on site and check same against architects and engineers drawings before commencing work. Figured dimensions to be used in preference to scaled dimensions, large scale details to be used where available; errors, discrepancies or omissions are to be reported to the architect immediately for clarification before work is undertaken.

These drawings are to be read in conjunction with structural engineer's, civil engineer's, mechanical engineer's or plumbing consultant's drawings where specified.

All work and material used to comply with SABS standards and NATIONAL BUILDING REGULATIONS ACT 103 of 1977 and amendments thereto as well as the by-laws of the relevant local authority.

All new construction HEALTH AND SAFETY Regulations to be strictly complied with. A comprehensive Health & Safety Plan to be submitted to the Principal Agent/ Project Manager for review and monitoring.

PROJECT

MOFFETT OFFICE PARK ::

FLOOR FINISH PLAN

Project number	24-07E
Date	2025/06/02
Drawn by	AKH
Checked by	Paul Schmidt
Scale	As indicated

25GS-C_AS6-01

--- A_25GS-C_AS6-01