


lasting strength
with fibre-cement


nutech
ROOFING AND CLADDING SOLUTIONS

Manufactured by

EVERITE
Established in 1941

FASCIA & BARGE BOARDS

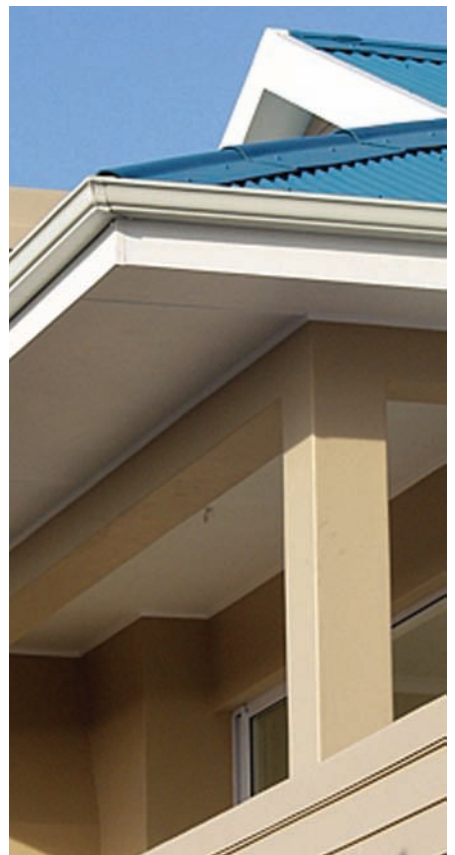

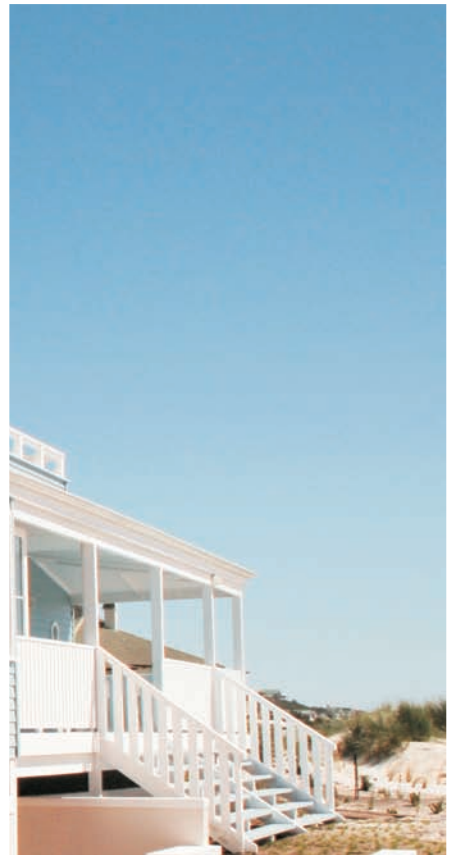

CONTENTS

About Everite and Nutec	2
Nutec Fascia and Barge Boards : Features and Product Range	4
Accreditation	7
General Design Criteria	7
Safety, Handling and Storage	8
Installation Guidelines	9
Installation Procedures	10
Nutec Fascia and Barge Boards Fixing Accessories	14
Nutec Victorian Fascia Joiners	14
Nutec Fascia Joiners	15
Everite National Offices and Contact Details	16

Catalogue Information

The information contained in this catalogue serves as a general guide only and should not be accepted as the standard for all construction. EVERITE can assist in designs of a special nature, however, architects, engineers and specifiers must finally approve the acceptability in terms of the design and construction criteria, as well as other implications.

About Everite and Nutec

■ Everite Building Products

Everite Building Products, wholly owned by JSE listed Group Five, has been associated with the South African building industry since 1941. Producing a wide range of materials that satisfy the needs of the commercial, industrial and residential market sectors, Everite is renowned for its comprehensive range of Nutec Roofing and Cladding Solutions and includes fibre-cement roofing, cladding, ceilings and building columns amongst others.

Nutec fibre-cement high performance properties and added benefits include: the use of safe renewable fibres; considerable tensile strength with enhanced dynamic load bearing properties; excellent thermal properties; water and wind resistance; hail resistance; fire resistance and resistance to fungus, rodents and acid.

A programme of quality assurance in accordance with the requirements of the International Standards Organisation (ISO 9001:2008) is entrenched in Everite's process and management systems. Quality of all products is continuously monitored as specified by the South African National Standards and recognised international bodies.

Everite's 54 hectare manufacturing facility near Johannesburg is well located and has immediate access to all major road and rail links to national destinations and major ports. The company has branches located at major centres throughout South Africa. Nutec products are distributed through leading stockists countrywide and an established export market further endorses the international acceptance of the Nutec Roofing and Cladding Solutions range of products.

■ Nutec

Nutec is the registered name for products manufactured without asbestos as a raw material. Nutec fibre cement products are manufactured using a mixture of cellulose fibre, cement, silica and water.

Through ongoing research and development, Everite Building Products are committed to provide product of world-class quality.

Accordingly, the Nutec product range is continuously reviewed not only in the interests of the end-user and superior product performance, but also with respect to its impact on the environment. Everite Building Products has over the years established a reputation for producing a variety of outstanding quality products which have been used in a wide range of external and internal applications.

Environmental benefits of Nutec Fibre Cement

- Environmental costs incurred by using fibre cement are measurably less than for other building materials. (Low embodied energy per m²).
- Requires less energy in assembly and construction than all other wall materials except timber.
- Low energy consumption in transportation and installation.
- Environmental costs relating to ozone layer depletion, carcinogenic substances and solid waste emissions are almost negligible.
- Low environmental impact in relation to ozone layer depletion, carcinogenic substances, and solid waste emissions.
- No pesticides are involved in the manufacture or use of fibre cement.

The benefits of Nutec Fibre Cement

- The use of safe fibres.
- Considerable tensile strength with enhanced dynamic load bearing properties.
- Cost competitive.
- Excellent thermal properties.
- Water tight and wind resistant.
- Hail resistant.
- Fire-resistant.
- Fungus and rodent resistant.
- Acid resistant.
- Complies with SABS ISO 9933.
- ISO 9001 : 2008 Quality Management System.

The environmental benefits in the manufacturing process of Nutec Fibre Cement

- Recycling the water used in production many times.
- Recycling solid wastes.
- Using sustainable raw materials in production.

Embodied Energy – Definition

Embodied energy is the energy consumed by all of the processes associated with the production of a building, from the mining and processing of natural resources to manufacturing, transport and product delivery. Embodied energy does not include the operation and disposal of the building material. This would be considered in a life cycle approach. Embodied energy is the 'upstream' or 'front-end' component of the lifecycle impact of a home. Fibre cement is one of the most energy efficient materials on the market and it has one of the lowest embodied energy contents per square metre of cover of any building product.

FEATURES

Nutec Fascia and Barge Boards

The comprehensive range of Nutec Fascia and Barge Boards from Everite have been designed to suit virtually any roof, whether slates, tiles or sheeting. They provide a functional finish by protecting the underlying timber structure from the elements, as well as adding visual impact to the building. Nutec Fascia and Barge Boards are ideal to cover up or replace weathered or rotten timber fascias and boards on old buildings.

In high wind areas barge boards form an important component of the roof structure, as they protect slates or tiles from being dislodged by the wind at the gable ends.

■ Features

Nutec Fascia and Barge Boards exhibit all the inherent features of Nutec fibre-cement and provide a cost effective solution when compared to alternative materials.

Nutec Fascia and Barge Boards are:


- Cost effective
- Light in weight and easy to cut and install (tungsten tip blades are needed to cut)
- Not affected by moisture and resistant to rot and corrosion
- Easy to paint and will accept any water-based paint without pre-treatment.

PRODUCT RANGE, DIMENSIONS AND PROPERTIES

Nutec Fascia and Barge Boards Product Range, Dimensions and Properties

■ Nutec Fascia Boards


Product no.	Thickness mm	Size mm	Length mm	Average Mass per unit kg
Plain (Medium Density) Un-grooved				
040-906	10	150	3 000	6
040-904	10	225	3 000	10
041-237	10	300	3 000	13
041-231	10	150	3 600	8
040-903	10	225	3 600	12
040-902	10	300	3 600	15
041-201	12	150	3 000	8
041-202	12	225	3 000	11
041-203	12	300	3 000	15
041-204	12	150	3 600	9
041-205	12	225	3 600	14
041-206	12	300	3 600	18
Plain (Medium Density) Grooved				
042-423	12	150	3 000	8
042-434	12	225	3 000	11
042-426	12	300	3 000	15
042-443	12	150	3 600	9
042-454	12	225	3 600	14
042-446	12	300	3 600	18
Plain (High Density) Grooved – non stock item*				
041-501	15	150	3 000	11
041-502	15	225	3 000	16
041-503	15	300	3 000	22
041-504	15	150	3 600	13
041-505	15	225	3 600	20
041-506	15	300	3 600	26
Victorian fascias – non stock item*				
754- 510	6	225	1 000	2

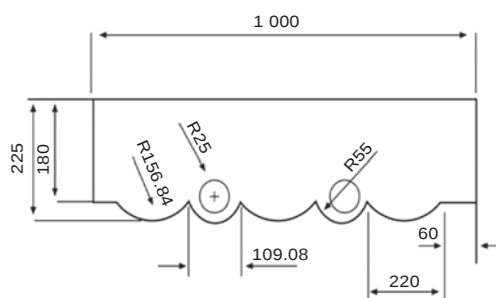


* Non-stock items : available on order. Lead Time : 2 to 3 weeks from date of order.

PRODUCT RANGE, DIMENSIONS AND PROPERTIES

■ Nutec Barge Boards

Product no.	Size mm		Length mm	Average Mass per unit kg	Sketch of Article
	Dimension A	Dimension B			
Socketless					
721-767	100	75	3 000	6,0	
721-731	200	80	3 000	6,0	
721-740	275	80	3 000	11,0	
721-780	260	260	3 000	16,0	
Socketed					
721-771	210	210	1 880	9,0	
721-720	210	210	3 080	13,0	
721-770	260	260	3 080	14,0	

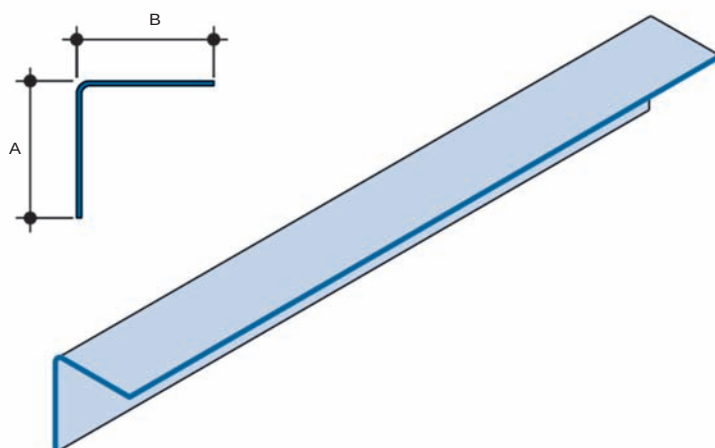

Accreditation : SABS, SANS & ISO

Nutec Fascia and Barge Boards carry the SABS Mark under specification SANS 803:
Everite is an accredited ISO 9001:2008 Quality Management System listed company.

General Design Criteria

Supporting Structure

To ensure a high standard of finish, it is essential that the supporting structure is accurate. Warped, twisted or poor quality timber work will reflect in the final appearance of the Nutec Fascia or Barge Boards.

Made to Order Barge Boards

Please check with EVERITE to obtain more specific information.

Fixing Accessories

A range of jointing systems for Nutec Fascia and Barge Boards is available from EVERITE and full details are given under Fixing Accessories.

Site Service

Site service personnel are available on request and at no charge, to provide assistance on recommended storage, handling and erection of the Company's products.

SAFETY, HANDLING AND STORAGE

Safety, Handling and Storage Instructions

■ General

Manufactured from Nutec fibre-cement, Nutec Fascia and Barge Boards do not contain asbestos fibre and are therefore excluded from the following:

- Asbestos Regulations of 2001, which forms part of the Act No. 85: Occupational Health and Safety.
- South African Code SANS 10229: Packaging of dangerous goods for road and rail transportation in South Africa.

They do not pose any adverse effects on the environment. Off-cuts and dust created during site work may be disposed off on any non-hazardous waste landfill site.

■ Storage and Handling Instructions

General Handling

Nutec Fascia and Barge Boards are manufactured from a composite material containing cement and may be damaged under excessively high shock loads. Reasonable care should therefore be taken to ensure that the products are not dropped or subjected to rough handling.

Storage

- Prior to Installation Nutec Fascia and Barge Boards must remain on pallets and kept under cover until installed.
- Strict stock rotation should be adhered to.

Storage On-site:

- A suitable level compacted area must be made available where Nutec Fascia and Barge Boards can be stored safely so that they cannot be damaged or soiled by passing traffic.
- They must be stacked clear off the ground on suitable timber supports at maximum 400 mm centres.
- **Preplanning: Adequate preplanning of deliveries should be made to ensure that Nutec products are not stored on site for excessive periods. If this is unavoidable, they should be kept under cover until installed.**

Handling

- The creation of excessive dust while working with the product should be avoided and therefore the using of fast turning power tools such as angle grinders are not recommended.
- Ordinary carpenters' tools can be used effectively.

General Installation Guidelines

- All rafter ends, purlins and battens must be accurately lined up and trimmed.
- Where the spacing between the rafters is greater than 900 mm, supporting timber must be fixed between the rafters as additional support for the fascia boards. [Refer Fig. 2.](#)
- On gable ends trimmer battens must be fixed to the end of battens or purlins. This will provide a neat edge for the barge board and avoid fixing into end grain of the timber which is not good practice. [Refer Fig. 7.](#)
- Although Nutec Fascia and Barge Boards are nailable, when fixing near to the edge but not closer than 25 mm, holes must be drilled and not punched.

An ordinary hand drill and steel drill bits specially sharpened to a 20° angle are recommended. Do not use hammer drills and masonry bits.

INSTALLATION PROCEDURES

Installation Procedures

■ General


- Nutec Fascia and Barge Boards can be fixed directly onto the timber structure using nails or wood screws.
- Joints of Nutec Fascia and Barge Boards should not be made at the fixing points but between them.
- Nutec Fascia and Barge Boards do not require paint for protection, but will accept any water based paint without pre-treatment.
- Ideally, painting of the Nutec Fascia and Barge Boards should be done prior to erection with only touching up to be done after installation.
- Nail and screw heads must be coated with a rust-resistant undercoat before painting.

■ Nutec Fascia Boards


The sketches which follow will assist with the correct installation of Nutec Fascia Boards.

■ Supporting Structure

Fig 1 : Normal Fixing without additional support structure

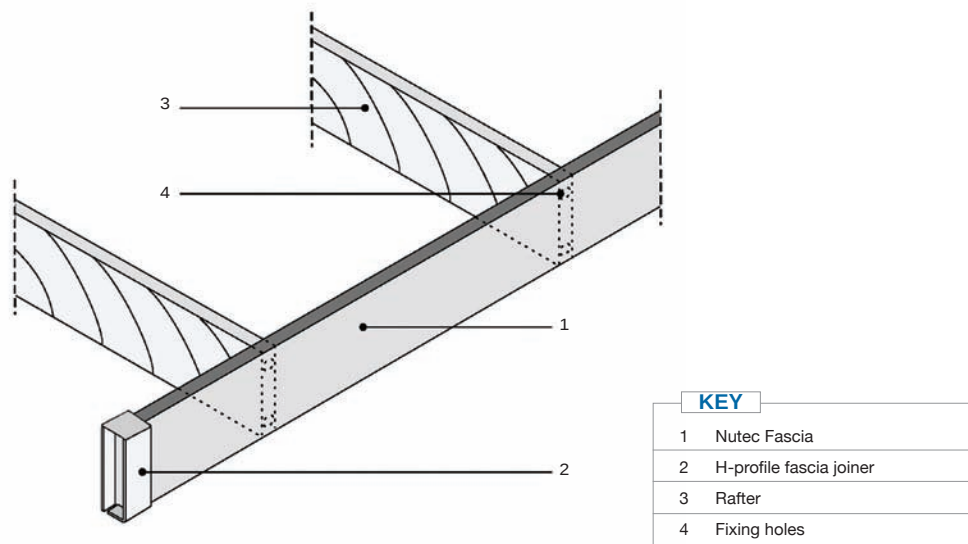


**Fig 2 : Additional Support Required For Nutec Fascia Boards
Where Distance Between Rafters Exceeds 900 mm**

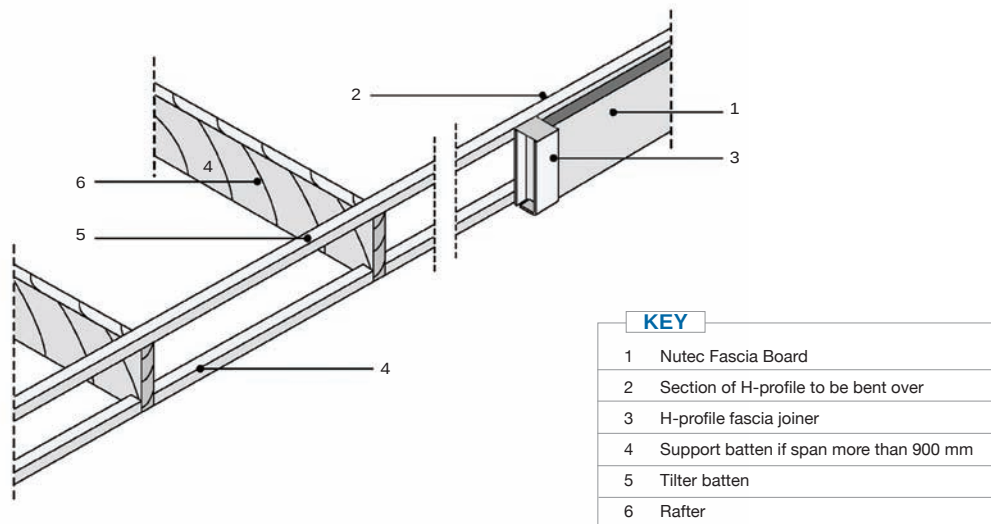

■ Jointing Systems

Various jointing systems for Nutec Fascia Boards are illustrated in [Fig 3](#) and [Fig. 4](#).

Fig 3 : Joint Detail Using H-Profile Fascia Joiners

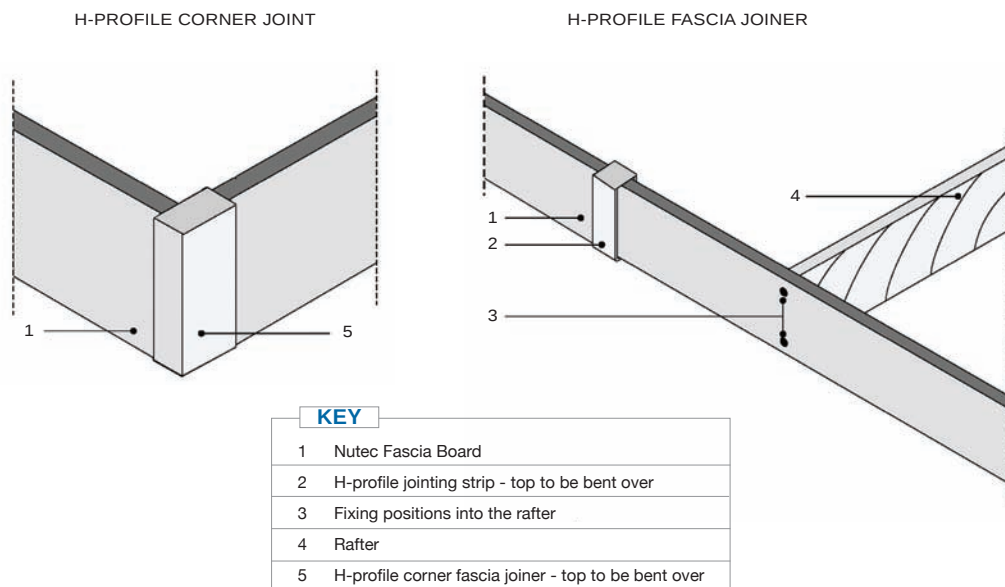

INSTALLATION PROCEDURES

Fig 4 : Joint Detail Using Fascia Jointing Plate


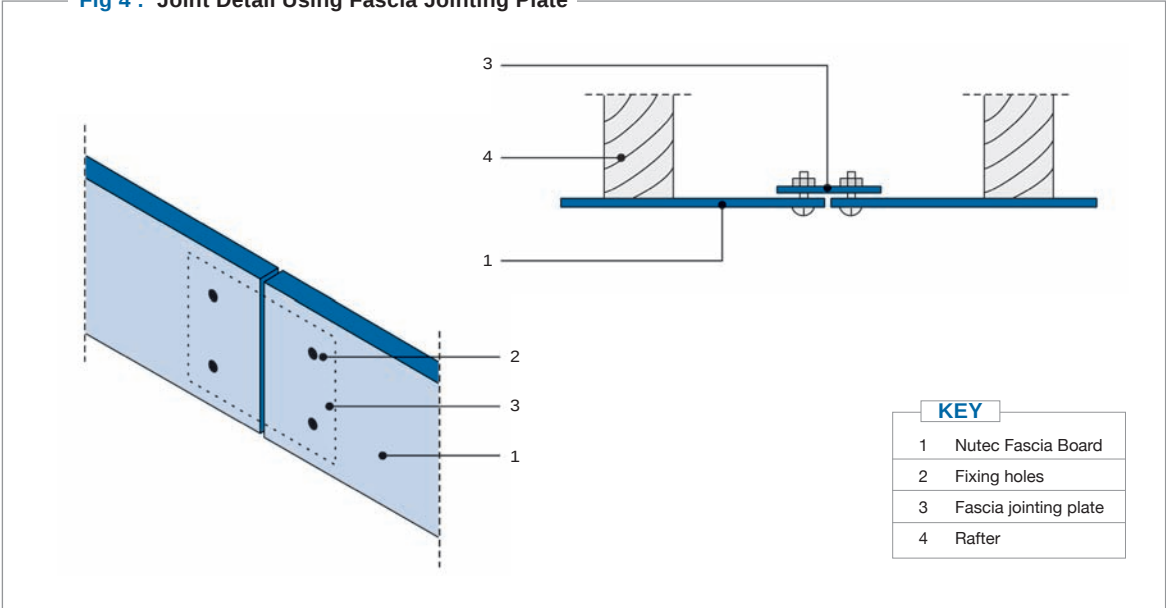


Fig 5 : Two Methods That Can Be Employed When A Nutec Fascia Board Is Used As A Barge Board

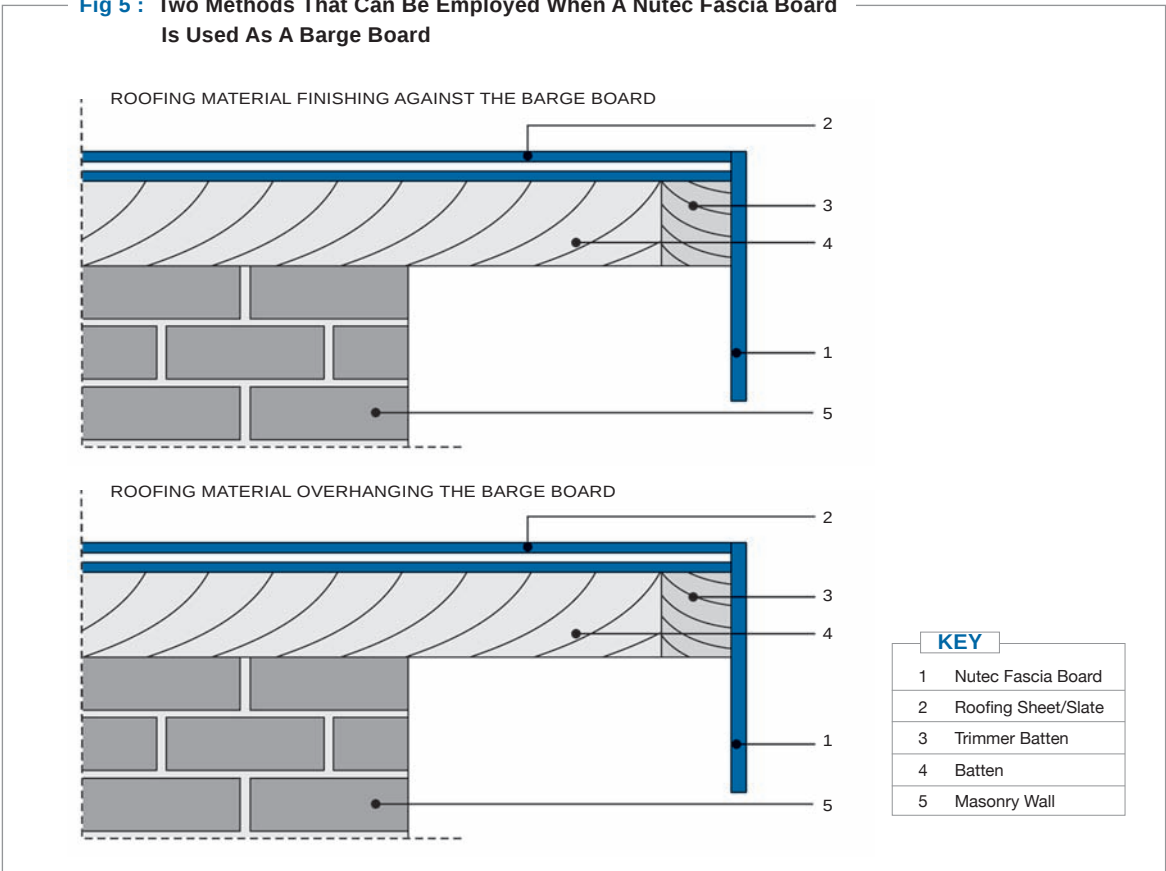

- **Using Nutec Fascia Boards As Barge Boards**
- **Moulded Barge Boards**

A range of moulded Nutec Barge Boards to suit most roofing material is available and the illustrations which follow should provide clear guidelines on installation and jointing.

Fig 6 : Joint Detail Using H-Profile Joiner with 90° Moulded Barge Board


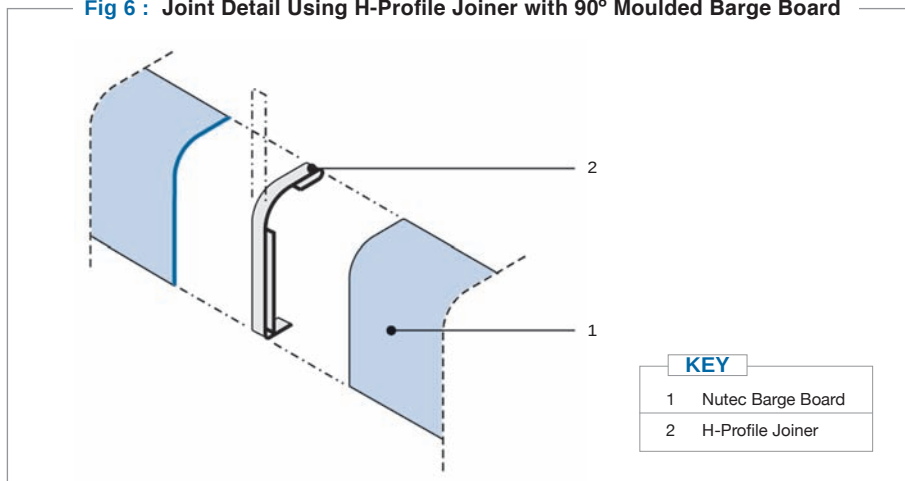



Fig 7 : Using A 90° Moulded Barge Board On A Gable End

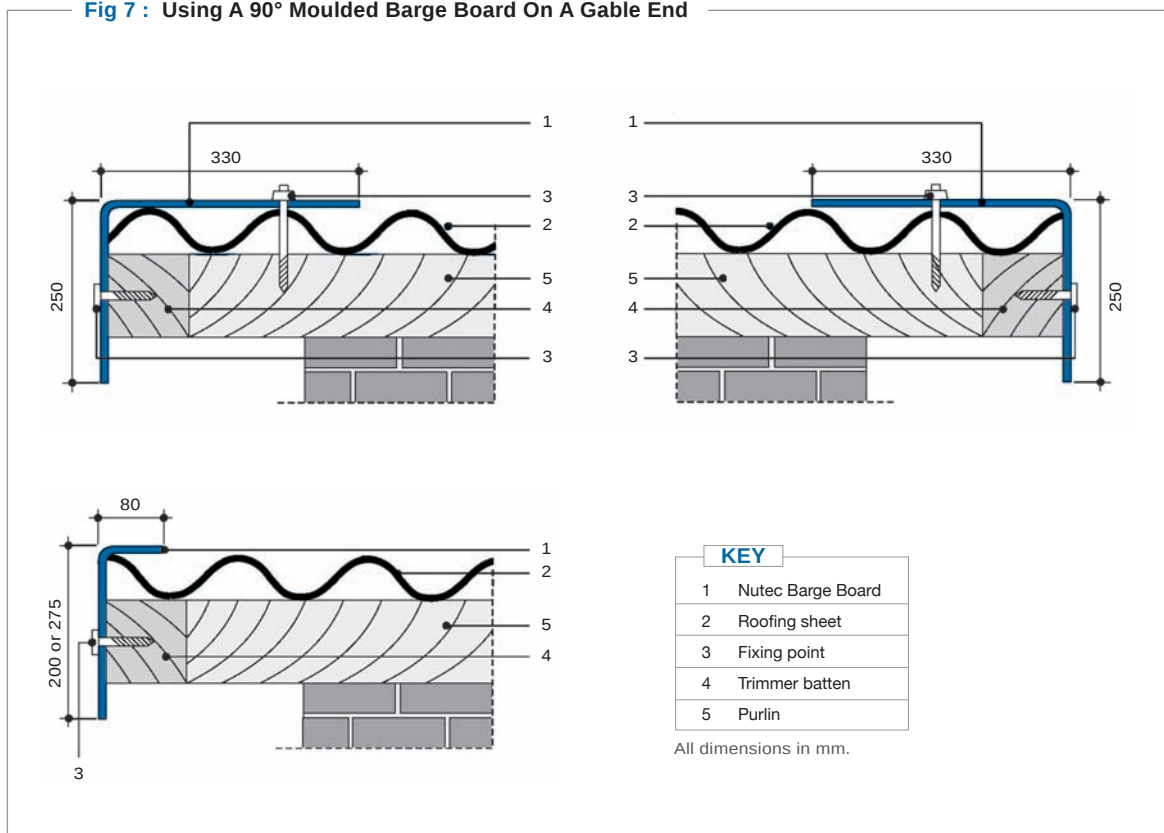

NB: In exposed and windy conditions, it is recommended that both wings of the Nutec Barge Boards are fixed.

INSTALLATION PROCEDURES

Fig 8 : Joint Detail For Nutec Barge Boards At Apex Of Roof

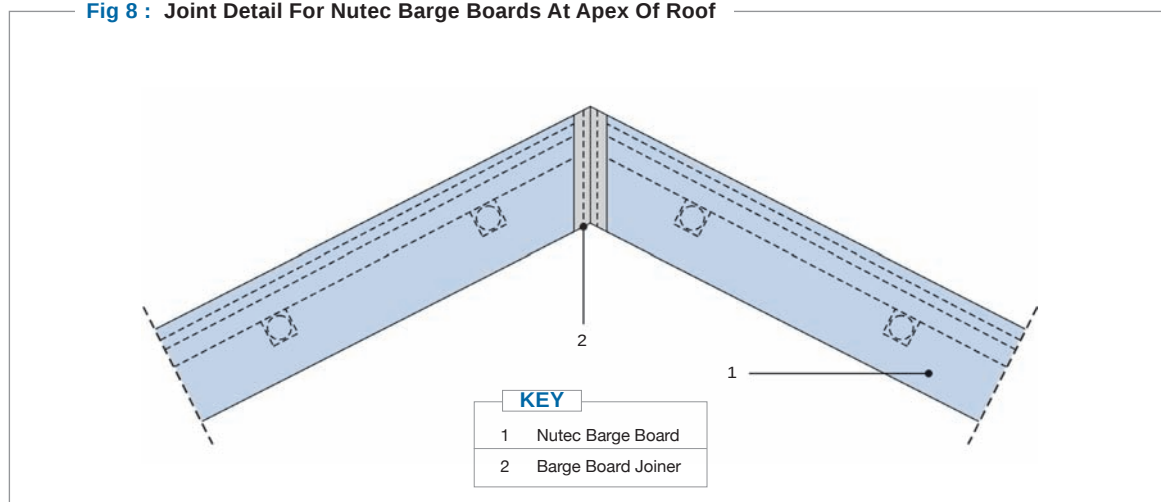

Nutec Fascia and Barge Boards Fixing Accessories

■ Barge Board Joiners

Product No.	Description	Size mm	Average Mass kg	Sketch of Article
685-189	Aluminium H-Profile Barge Board Joiner	260 x 260	0,1	
685-981	Chromaprep H-Profile Barge Board Joiner	260 x 260	0,2	
685-231	Plastic H-Profile Barge Board Joiners	200 x 80	0,1	
685-232	Plastic H-Profile Barge Board Joiners	275 x 80	0,1	
685-087	Steel H-Profile Barge Board Joiners	200 x 80	0,1	
685-088	Steel H-Profile Barge Board Joiners	275 x 80	0,1	



■ Victorian Fascia Joiners

Product No.	Description	Size mm	Average Mass kg
685-089 685-979	Victorian Fascia Joiners Chromaprep	180 x 6 180 x 9	0,04 0,06
<i>Non-stock items : Available on order</i>			

■ Screws and Nails

Use hardened steel nails with fluted shanks for best results. An alternative method would be to use No. 12 x 40 mm brass wood screws with countersunk heads.

■ **Nutec Fascia Joiners**

Product No.	Description	Size mm	Average Mass kg	Sketch of Article
685-240 685-241 685-242 685-243 685-244 685-245 685-246 685-247 685-248	H-profile Fascia Joiners - Plastic	150 x 10 225 x 10 300 x 10 150 x 12 225 x 12 300 x 12 150 x 15 225 x 15 300 x 15	0,05 0,07 0,09 0,05 0,07 0,09 0,05 0,07 0,09	
685-260 685-261 685-262 685-263 685-264 685-265 685-266 685-267 685-268	H-profile Fascia Corner Joiners - Plastic	150 x 10 225 x 10 300 x 10 150 x 12 225 x 12 300 x 12 150 x 15 225 x 15 300 x 15	0,05 0,07 0,09 0,05 0,07 0,09 0,05 0,07 0,09	
685-090 685-091 685-092 685-093 685-094 685-095 685-096 685-097 685-098	H-profile Fascia Joiners - Steel	150 x 10 225 x 10 300 x 10 150 x 12 225 x 12 300 x 12 150 x 15 225 x 15 300 x 15	0,05 0,07 0,09 0,05 0,07 0,09 0,06 0,08 0,10	
685-100 685-101 685-102 685-103 685-104 685-105 685-106 685-107 685-108	H-profile Fascia Corner Joiners - Steel	150 x 10 225 x 10 300 x 10 150 x 12 225 x 12 300 x 12 150 x 15 225 x 15 300 x 15	0,05 0,08 0,10 0,06 0,09 0,12 0,06 0,08 0,10	

CONTACT DETAILS

Everite National Offices

Call Centre 0861 333 835
+ 27 11 439 4400

www.everite.co.za



Sales Support Office

Telephone + 27 11 439 4400

Telefax + 27 11 903 7097

Bloemfontein

Mobile + 27 83 798 8049

Telefax + 27 51 522 1760

Cape Town

Telephone + 27 21 941 8640

Telefax + 27 21 941 8641

Durban

Telephone + 27 31 267 1903

Telefax + 27 31 267 1907

East London

Mobile + 27 79 516 6510

Telefax + 27 43 726 0343

George

Telephone + 27 44 873 2408

Mobile + 27 83 286 3435

Telefax + 27 44 873 2409

Middelburg (Mpumalanga)

Mobile + 27 83 778 2787

Polokwane

Telephone + 27 15 297 3559/62

Telefax + 27 15 297 3424

Port Elizabeth

Telephone + 27 41 401 8900

Mobile + 27 83 780 6162

Telefax + 27 41 486 1884

Worcester

Mobile + 27 83 286 3431

Telefax + 27 23 342 6966

Botswana (Gaborone)


Telephone + 27 11 439 4400

Telefax + 27 11 903 8327

Namibia

Mobile (00264) 81 124 2655

Telefax (00264) 64 40 5684

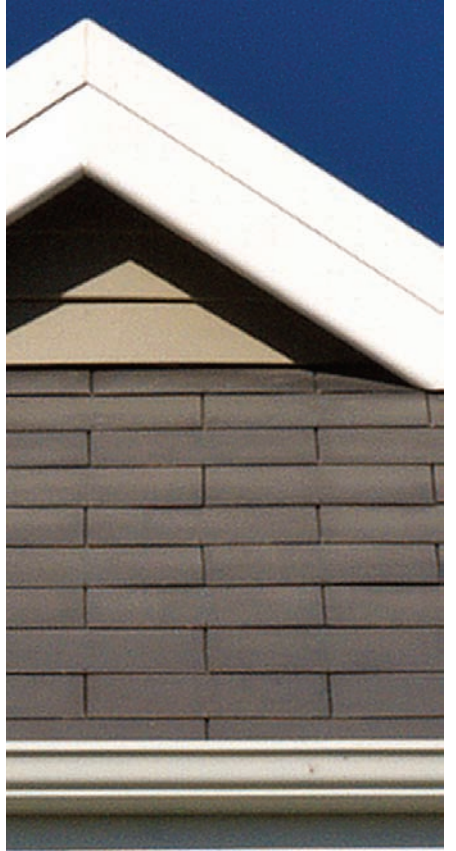



www.everite.co.za
call centre: 0861 333 835



Copyright © 2012
Everite Building Products (Pty) Ltd.
All rights reserved.