


GRS Klip-Lok 406

Global Roofing Solutions Klip-Lok 406™



Talk to **THE SMART ROOF PEOPLE**
Visit www.globalroofs.co.za or email
info@globalroofs.co.za



GRS Klip-Lok 406

GRS Klip-Lok 406 07/17

 **GRS**
GLOBAL ROOFING SOLUTIONS

Brownbuilt | HH Robertson



Typical Specification

Materials

The roofing shall be Klip-Lok 406 profile, roll-formed in continuous lengths in one of the materials in the table below. Klip-Lok 406 is obtained from Global roofing Solutions.

Material	Steel	Colour One Side	Colour Two Side
Galvanised Z275	ISQ 500	_____	_____
Chromadek® Z200		✓	Special
Zincalume® AZ150	G550	_____	_____
Clean COLORBOND™ AZ150		✓	Special
ZincAL® AZ150	G550	_____	_____
COLORPLUS® AZ150		✓	Special

The Profile

The profile is roll-formed from certified steel complying with (select from steel column in above table). The profile shall have 3 trapezoidal ribs at 203mm centres giving a nett cover of 406mm. The male rib shall have spurs to ensure a positive double interlocking action at side-laps. Each pan shall incorporate two stiffener ribs.

Assembly

It is recommended that Klip-Lok 406 sheeting be laid by an approved contractor in strict accordance with the manufacturer's specifications. When using a GRS (Brownbuilt) Approved Contractor, a five year guarantee on site-workmanship and watertightness may be issued after approval by Global Roofing Solutions.

Flashings

Stop endings must be formed at the apex and the pan turned down at the eaves to form a drip. The roof sheeting shall be closed as necessary, with purpose-made flashings of a design approved by the supplier. These flashings shall be notched around ribs where necessary, and fixed on S10 clips. All these operations must be performed with special tools available from the supplier.

Note

A GRS / Brownbuilt installation warranty will only be honoured if the GRS KT-PV Clamp is used when installing photovoltaic panels.

Site Handling

Klip-Lok 406 sheets should be suitably supported clear of the ground under well ventilated cover, away from risk of damage by building operations, contact with cement, dust, lime and abrasive dust, until required to be installed.

Cleaning Up

The complete roof must be kept clean and free of any swarf and debris.

Quality Assurance


The manufacturer shall be assessed and certified as complying with ISO 9001:2008 Quality Management System.

Translucent Sheeting

The Klip-Lok 406 profile is available in Polycarbonate.



Solar Clamp

Please refer to GRS PV Clamp brochure.



The Concealed Fixing Concept

Klip-Lok 406 Profile

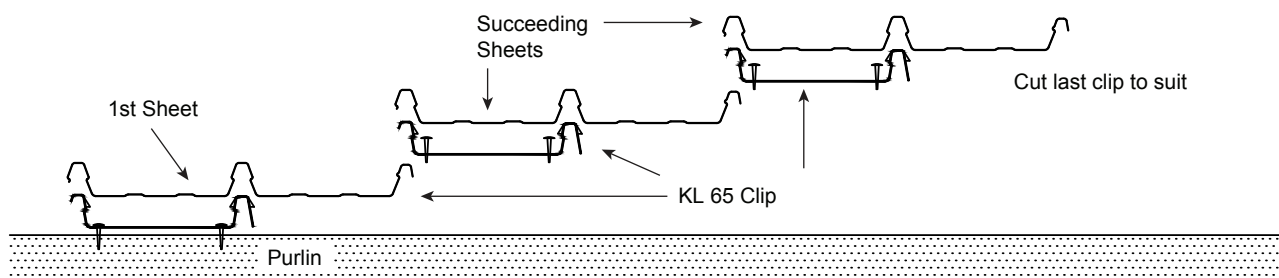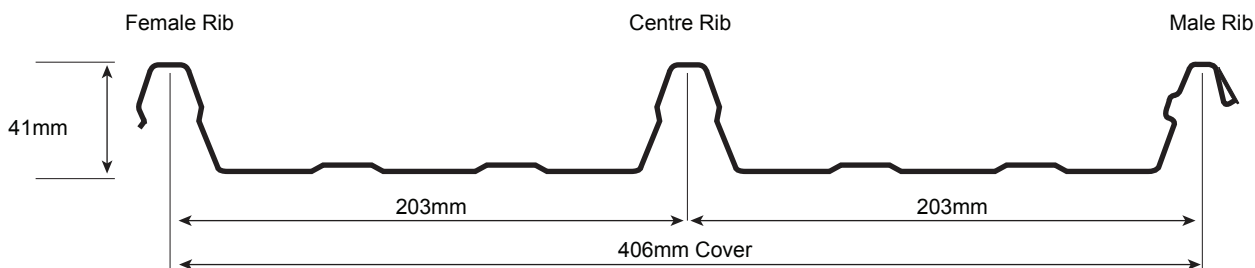

Fasteners

The recommended fasteners for fixing the KL 65 clips to steel or timber purlins are as follows:

For Steel Purlins

At least 3 threads should protrude past the support.

1mm to 4,5mm thick

No.10 - 16 x 16mm long self-drilling Wafer head PH2 screws #3 drill point.

5mm to 12,5mm thick

No.12 - 24 x 38mm long self-drilling Wafer head PH3 screws #5 drill point.

For Timber Purlins

The screw should penetrate the purlin by the same depth recommended as if there were no insulation.

No.10 - 11 x 45mm long self-drilling Wafer head PH2 screws. Type 17 drill point.

Where insulation is installed

Between purlin and sheeting, the length of screws should be increased depending on the compressed thickness and density of the insulation. Please refer to the GRS Installation Manual for additional information on insulation fixing details.

***For light steel frame purlins less than 1mm thick, please contact GRS.**

Note

Where screws exceed 45mm long, they should be No.12 with a PH3 head.

KL 65 clip



Note

Fasteners must be selected to match the life expectancy of the roofing and cladding material. The coating class for fasteners, complying with SANS 1273, should be used in conjunction with all roofing and cladding material. For a full range of compatible fasteners, please refer to the GRS Installation Manual.

Additional Applications


Sheet Lengths

Klip-Lok 406 is available, ex-factory, in sheet lengths limited only by transport restrictions, normal loads 12.5m and abnormal loads 18.6m. Longer lengths can be milled on site, eliminating end laps which are not recommended.

End lapping negates the concealed fix concept and no water tightness guarantee can be given.

End lapping reduces the life expectancy of the roof, due to corrosion.


Bullnosing and Cranking

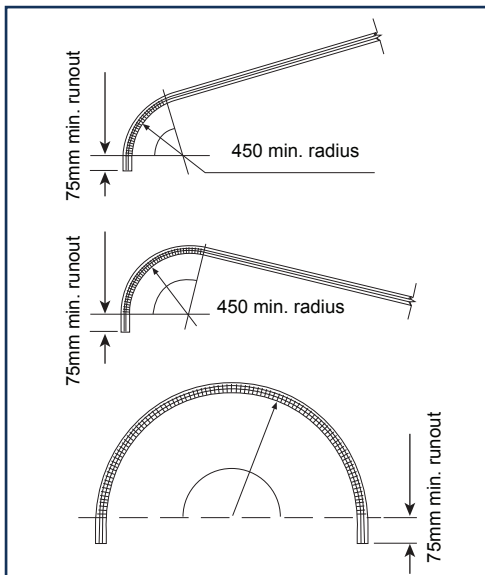

Note


Reverse cranking is not possible.

Rib Cap Detail

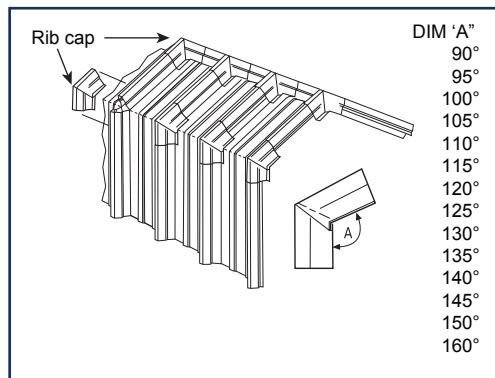

Springing

Klip-Lok 406 can be sprung to a minimum radius of 36m convex or 40m concave with internal spans for purlins at 1.5m maximum.


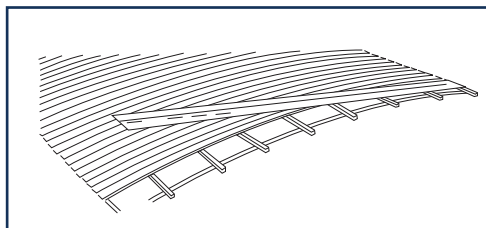


Note

Consideration for road transport has to be taken into account.

Refer to the GRS Installation Manual for detailed dimensions and fixing instructions.

Site cranking for milled sheets is available on application.

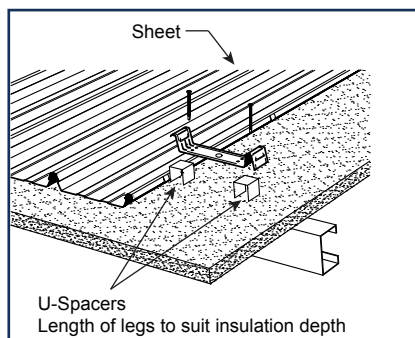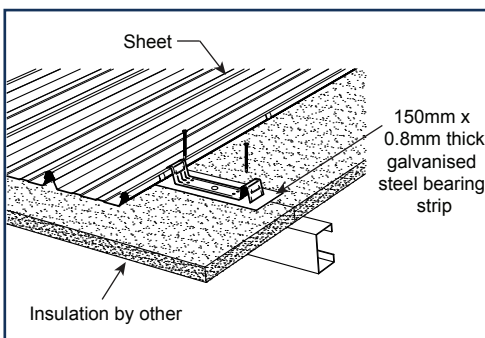

Note

As a general rule, for transportable sheet lengths use a bearing strip and for longer sheet lengths use U-Spacers.

Please contact GRS for Insulation specific fixing details.

Profile: Klip-Lok 406™

Load Span Table

The recommended purlin support centres are based on the following design criteria and obtained through testing:


Ultimate Superimposed Distributed Load		Ultimate Uplift Load
ROOFS	1.50 kN/m ²	1.60 kN/m ²

Drainage Table

Maximum roof run (in metres) for roof slopes and rainfall intensities shown. These figures are based on unrestricted, free flow of water.


Roof Slope	Rainfall Intensity mm/h			
	250	300	400	500
1 in 50 (1°)	64	53	40	32
1 in 30 (2°)	80	66	50	40
1 in 20 (3°)	94	78	58	46
1 in 12 (5°)		95	70	56
1 in 7.5 (7.5°)			83	66
1 in 6 (10°)			91	73

Maximum Allowable Support Spacings						
Type of Span	GALVANISED / CHROMADEK®		ZINCALUME® / COLORBOND™		ZINCAL® / COLORPLUS®	
	0.5mm ISQ550 (3T)	0.58mm ISQ550 (3T)	0.47mm G550	0.53mm G550	0.5mm G550	0.55mm G550
Roofs						
Single Span	1.400m	1.800m	1.300m	1.500m	1.400m	1.800m
End Span	1.700m	2.100m	1.600m	1.900m	1.700m	2.100m
Internal Span	2.000m	2.500m	1.900m	2.300m	2.000m	2.500m
Cantilever (unstiffened)	0.180m	0.260m	0.150m	0.180m	0.180m	0.2000m
Cantilever (stiffened- max. sheet length of 13m)	0.400m	0.600m	0.350m	0.400m	0.400m	0.4500m
Normal Mass kg/m ²	5.84	6.78	5.31	5.98	5.92	6.43

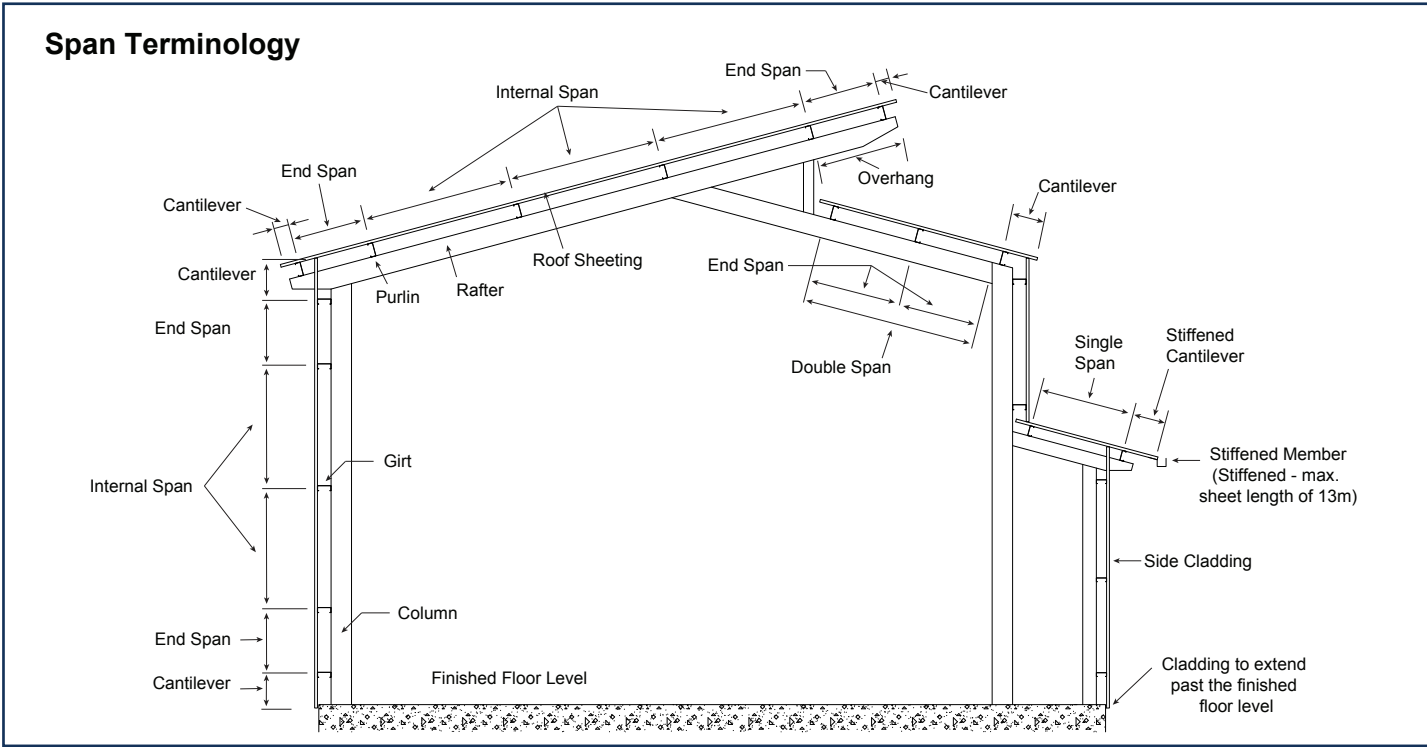

Popular Flashings

Available in 0.58mm / 0.8mm thick galvanised Z275 steel, 0.53mm thick Zinalume® AZ150 or 0.55mm thick ZincAL® AZ150. Or with a colour option Chromadek® (Galvanised Z200), Clean COLORBOND™ (Zinalume® AZ150) or COLORPLUS® (ZincAL® AZ150) finish to one / two sides.

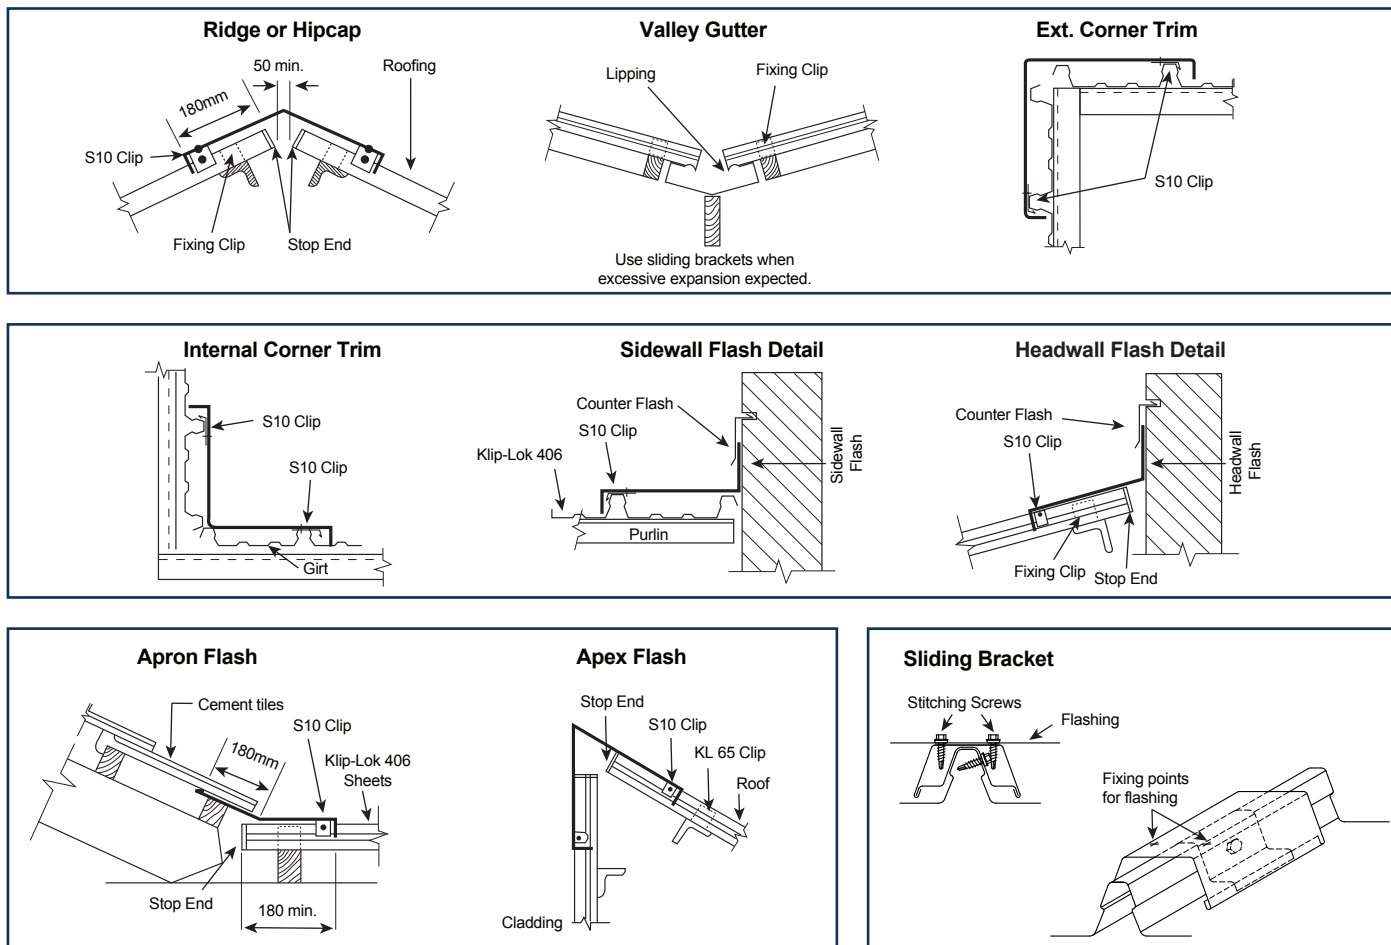


** When sheet lengths are over 30m flashings must be fixed to sheets using sliding brackets.*

Tools


Notching Tool

Used to notch out sheet ribs profile in the flanges of flashings to fit over sheet ribs.




Turn-up Tool

Used to stop end sheets upward at the top of the roof slope to prevent water blown up and over sheet end.



Turn-down Tool

Used to lip sheets downward at the eaves to prevent water flowing back on the underside of the sheets.



Please visit our website or contact GRS for standard flashing details.

Isando
Bloemfontein
Cape Town
Durban
East London

Tel: +27 (0) 11 898 2900
Tel: +27 (0) 51 432 3724
Tel: +27 (0) 21 521 1900
Tel: +27 (0) 31 538 0940
Tel: +27 (0) 43 731 1895

Nelspruit
Mossel Bay
Polokwane
Port Elizabeth
Rustenburg

Tel: +27 (0) 13 492 0746
Tel: +27 (0) 44 695 0014
Tel: +27 (0) 51 293 0313
Tel: +27 (0) 41 486 1270
Tel: +27 (0) 14 596 6121

Upington
Exports
Botswana
Ghana
Lesotho

Tel: +27 (0) 54 332 1656
Tel: +27 (0) 11 898 2900
Tel: +267 (002) 310 5761
Tel: +27 (0) 11 898 2976
Tel: +266 (002) 22 312 244

Mozambique
Namibia
Zambia
Zimbabwe

Tel: +258 (002) 82 305 0506
Tel: +264 (002) 61 263 890
Tel: +260 (002) 21 225 1315
Tel: +263 (002) 477 4699



Brownbuilt | HH Robertson



CONSOLIDATED STEEL INDUSTRIES
(PTY) LTD.



@GRSRoofs

e.&o.e